



Wood Treated Right™

Wood Treated Right™

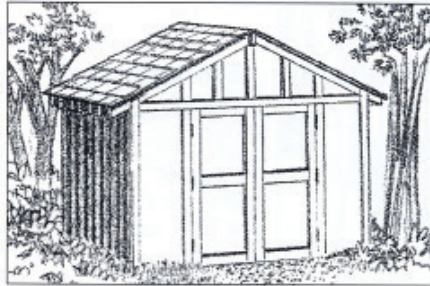

Storage Shed

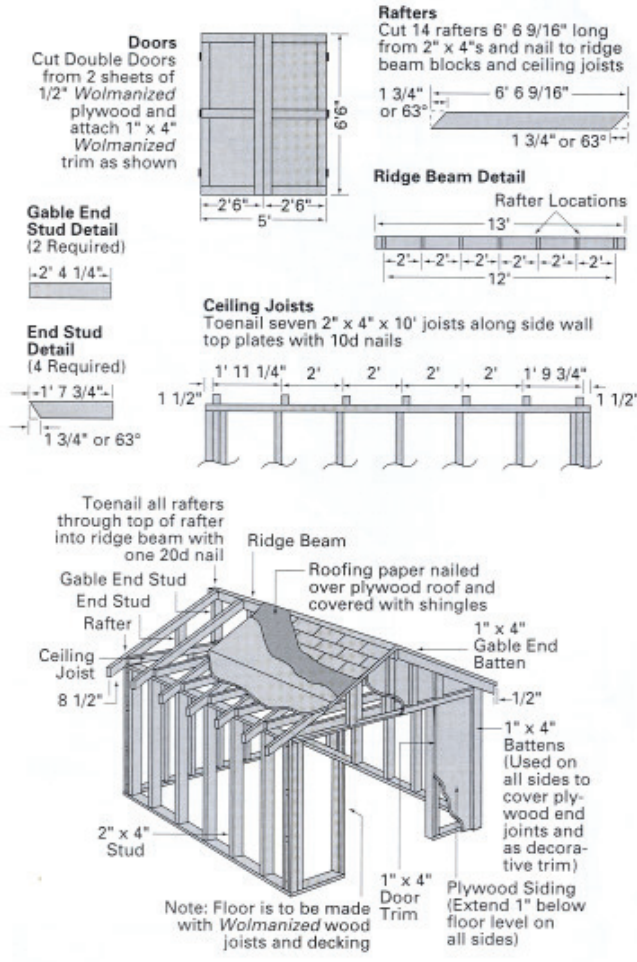

SHED Lumber

- Framing:**
- ▲ (44) 2" x 4" - 8'
 - ▲ (11) 2" x 4" - 10'
 - ▲ (5) 2" x 4" - 12'
- Ridge Beam:**
- ▲ (1) 2" x 6" - 14'
- Door Trim:**
- ▲ (1) 1" x 4" - 8'
 - ▲ (4) 1" x 4" - 10'
- Doorway and Gable End Batten:**
- ▲ (8) 1" x 4" - 8'
 - ▲ (2) 1" x 4" - 6'

Batten Trim:

- ▲ (2) 1" x 4" - 10'
- ▲ (2) 1" x 4" - 12'
- ▲ (36) 1" x 4" - 8'

Wall, Roof, Door and Gable End Covering:
20 sheets 4' x 8' x 1/2" Exterior Plywood





Hardware and Other Materials

- ▲ 3d, 6d, 10d and 20d Nails as required
- ▲ Steel 'T' Door Hinges: 3 pr.
- ▲ Safety Hasp: 1 pc.
- ▲ Shingles: Sufficient amount for 170 sq. ft. Roof Area plus 13 ft. of Ridge and 26 ft. of Eaves

- ▲ Asphalt Roofing Paper: 2 rolls
- ▲ 7/16" Roofing Nails as required

FLOOR Lumber

- ▲ (12) 4" x 4" - 4' Main Support Posts (length may vary according to terrain)
- ▲ (4) 2" x 8" - 12' Header Boards
- ▲ (2) 2" x 8" - 12' Fascia Ribbon Boards
- ▲ (2) 2" x 8" - 10' Fascia Ribbon Boards
- ▲ (8) 2" x 8" - 10' Joists
- ▲ (22) 5/4" x 6" - 12' Floor Decking

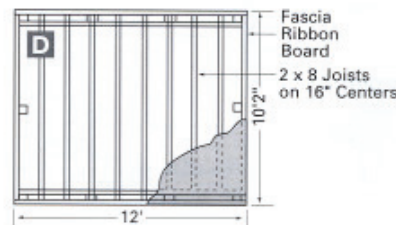

- A. Rear Wall Framing
- B. Front Wall Framing
- C. Side Wall Framing
- D. Floor Decking
- E. Corner Post Assembly and Top View

